




# NS LION+

↔ ↔  
↕ ↕  
PRINT WIDTH  
80 - 220mm

🕒  
PRINT SPEED  
9 or 18mtr / min

📄  
RESOLUTION  
800 & 1600 dpi

💧  
CMYK  
2 liter ink tanks

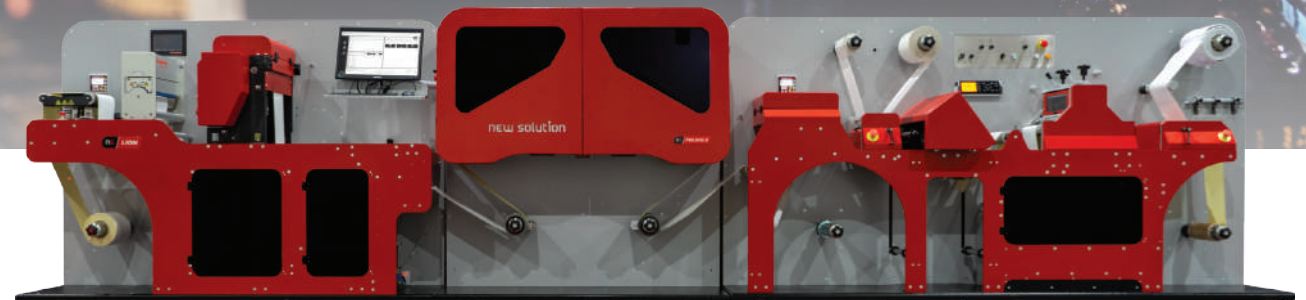

**Easy, fast and high-quality digital labels for a wide range of medias**

The perfect all-in-one solution: coating, printing, laminating, die cutting and slitting.

Visit Us  
[www.mtexns.com](http://www.mtexns.com)

**PSL labels for**  
Beverages / Food / Healthcare / Household / Logistics / Other

<b>DIMENSIONS</b>	Dimensions: width 2250mm / depth 1247mm / height 1821mm & Weight:1150Kg			
<b>OPERATION ENVIRONMENT</b>	Operation:20°C/68°F to 30°C/86°F (25°C/77°F Recommended); Humidity: 22 to 80% RH (non-condensing)			
<b>SPECS</b>	Webguide BST	Corona	Flexo Unit	Infra Red drying unit
<b>POWER CONSUMPTION</b>	15 000 watts - 230VAC - 50Hz			

NS CS22+

<b>DIMENSIONS</b>	Dimensions: width 2246mm / depth 1038mm / height 1038 mm & Weight: 475Kg		
<b>WEBGUIDE</b>	Webguide BST		
<b>INK SYSTEM</b>	VERSAPASS DN INK	<b>PRINTING SYSTEM</b>	VERSAPASS DN Printhead
<b>MEDIA</b>	Label media width: 80 mm to 230 mm		
	Maximum printable width:220mm		
	Media thickness: 60gsm to 130 gsm till 1 mm max		

<b>OPERATION ENVIRONMENT</b>	Operation:20°C/68°F to 30°C/86°F (25°C/77°F Recommended); Humidity: 22 to 80% RH (non-condensing)		
<b>WINDERS</b>	Roll size:Max. Ø500mm & Core Size:76mm		
<b>PLATFORM</b>	Double sided frame for printing section; Superior stiffness and reliability		

	Unwinder & Rewinder for easy access	Large service door & Easy ink tank access
	Optical print mark/label sensor with adjustable position	Splice table with magnet clamps

<b>INTERFACE</b>	Unique and user-friendly software		
<b>RIP SOFTWARE</b>	CALDERA / WINDOWS DRIVER		
<b>POWER CONSUMPTION</b>	2 660 watts - 230VAC - 50Hz		

<b>DIMENSIONS</b>	Dimensions:width 2900mm / depth 1120mm / height 1640mm & Weight:1200Kg		
<b>OPERATION ENVIRONMENT</b>	Operation:20°C/68°F to 30°C/86°F (25°C/77°F Recommended); Humidity: 22 to 80% RH (non-condensing)		
<b>SPECS</b>	Die cutter technology: Semi-Rotary magnetic cylinder	Webguide BST	
	Digital Cutting Plotter	Cold Lamination	Slitting & MATRIX Waste Removal
<b>POWER CONSUMPTION</b>	2882 WATTS - 230V AC - 50Hz		

NS PROEVO+

NS TIGER+

NS LION+

NS F22+

**MTEX NS**

Visit Us  
[www.mtexns.com](http://www.mtexns.com)


Rua Academia FC Famalicão, Pav. 17  
4760-482 V.N. de Famalicão  
Portugal

+351 252 371 109  
[info@mtexns.com](mailto:info@mtexns.com)



Visit Us  
[www.mtexns.com](http://www.mtexns.com)

# Main Features



**NS CS22+**

**NS PROEVO+**

**NS F22+**

