

*New!*

www.xlam.biz

**Xlam**

Ideal for Signage!

**XL1600 cold&hot**

*Signage!*



Ø max rolls

main rolls Ø

max. temperature

max. material thickness

300 mm

130 mm


120 °C

30 mm

Ideal for signage ✓

Speed 0,6 - 6 mtl/min ↗

For thick and heavy rolls ↔

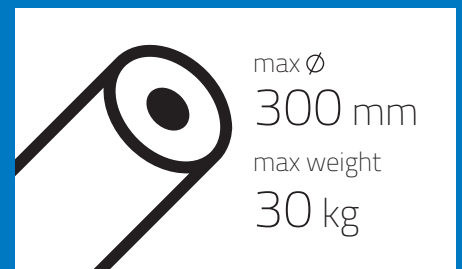

# XL1600 cold&hot *Signage!*

PNEUMATIC COLD/HOT LAMINATOR

[www.xlam.biz](http://www.xlam.biz) / [info@xlam.biz](mailto:info@xlam.biz)

## Unique features!

Hot/cold roll-to-roll pneumatic laminator 1600 mm Complete with rewind. ***Ideal for signage, with larger brackets (210mm) to accommodate the reels of very thick materials (up to 30cm in diameter and 30kg in weight) and minimum speed: 0.6mtl/min.*** Silicone rolls 130mm (one heated), maximum temperature 120°C. Material thickness up to 30mm. Easy and fast to use, it saves you manpower and improves productivity.

## Model

Xlam 1600 Cold&Hot Signage

## Product code

XL1600CH-S

## Maximum roll film width

1600 mm

## Maximum material thickness

30 mm

## Maximum temperature

120 °C

## Minimum-maximum speed

0,6 - 6 lmt/min

## Silicon rolls diameter

130 mm

## Roller lifting

by air compressor

## Pedal advancement

included

## 4 poles

including media and liner take-up poles

## Heating time

10-15 minutes

## Heating method

internal with incandescent lamp

## Maximum power

2500 W

## High efficiency

No crease or bubble, guarantees excellent results even at temperatures below 120°C. Equipped with footswitch feeding, allows the operator to keep both hands free for the laminating of widest supports.

## Safety warranty

The photocell sensor prevents you place your hands near roller during the lamination. The emergency shutdown button is clearly visible on the front of the machine.

## Suitable for large diameter and heavy reels

300mm - 30kg

## Voltage

220 v - 50 hz

## Dimensions (l x h x p)

2000 x 1180 x 630 mm

## Weight

238 kg

## Packaging

anti-shock in legno

## Packaging dimensions (l x h x p)

2120 X 700 x 700 mm

## Packaging weight

250 kg

## Warranty

1 year

## Safety

photocell / CE certification

Authorized Reseller